



CLYIMATE IQ[®]

PRECISION HEATED AND HUMIDIFIED HOLDING CABINET



www.FWE.com/ClymateIQ



THE CLYMATE IQ® CABINET
TAKES THE GUESSWORK OUT OF
HOLDING FOODS AND PROVIDES
SUPERB RESULTS EVERY TIME

Scan the QR Code



www.FWE.com/ClymateIQ




— EXACT —

AS IN PERFORMANCE, EXECUTION, OR AMOUNT.
ACCURATE OR CORRECT.

USER-FRIENDLY, EASY-TO-READ, EASY-TO-SET,
COLOR-CODED CONTROLS ALLOW YOU TO SET THE UNIT
FROM 10% TO 90% RELATIVE HUMIDITY
AND 90°F (32°C) TO 200°F (93°C)

- To toggle between °F and °C
Press and Hold the left knob
for TEN (10) seconds
- Shows Air
Temperature
90°F - 200°F
(32°C - 93°C)
- Press to show actual
temperature and
humidity values
- To change set points,
Press and Hold Set
Values button, while
turning the temperature
or humidity knob
- Shows Relative
Humidity (RH)
10% - 90%

Main power switch

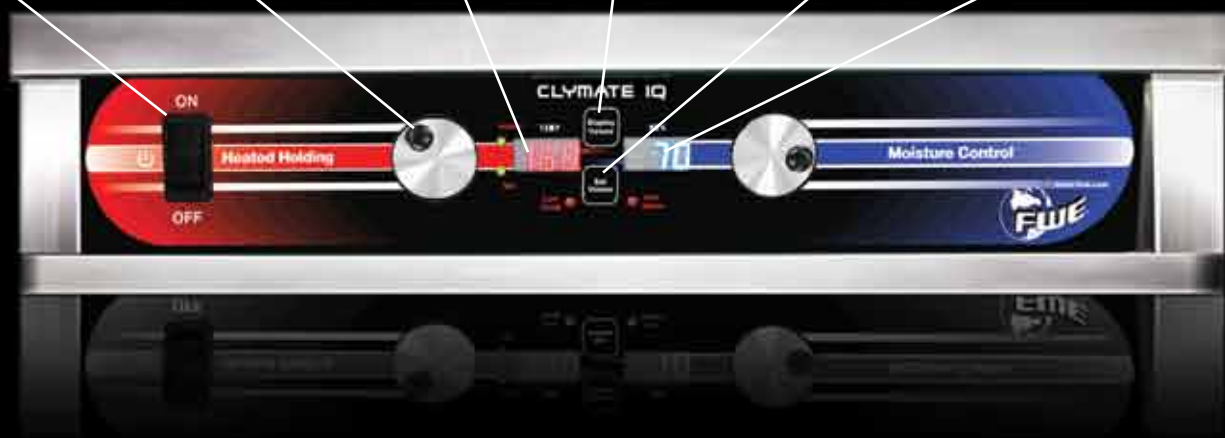

— PRECISION —

MAKE LIFE EASY

CLYMATE IQ[®] CABINETS

**START BY QUICKLY
GETTING UP TO THE
PROGRAMMED HEAT AND
HUMIDITY LEVELS**

- TWICE AS FAST AS THE COMPETITION -

INTUITIVE CLIMATE CONTROL[®]

**TECHNOLOGY AUTOMATICALLY
MAINTAINS THE SET LEVELS OF
HEAT AND HUMIDITY**

**PROPER LEVELS INSIDE THE UNIT MEANS FOOD
IS HELD UNDER PRECISE CONDITIONS,
RESULTING IN LESS WASTE.**



THE EXCLUSIVE LARGE
VOLUME REMOVABLE
WATER RESERVOIR
MAKES CLEAN UP A BREEZE,
JUST PULL OUT THE PAN AND
THE HEATING ELEMENTS LIFT
UP FOR EASY CLEANING.



THE EASILY REMOVABLE WATER RESERVOIR

THE CLYMATE IQ[®] INTRODUCES

INTUITIVE CLIMATE CONTROL[®]

THIS TECHNOLOGY REACHES THE SET
HUMIDITY AND TEMPERATURE IN JUST

30 MINUTES VERSUS

75 MINUTES FOR THE COMPETITION



Scan the QR Code



www.FWE.com/ClymateIQ

OUR **SELF-CLOSING HINGES**

ARE DESIGNED TO PULL A DOOR
SHUT AFTER IT HAS BEEN OPENED
AND RELEASED, AVOIDING LOSS OF

HEAT AND **HUMIDITY**



CLYMATE IQ[®] GETS BACK TO TEMPERATURE FAST

YOU DON'T HAVE TO WORRY ABOUT LOOSING
HEAT AND **HUMIDITY** IF YOU OPEN AND CLOSE
THE DOOR REPEATEDLY DURING **PEAK SERVICE TIMES.**

IQ





DESIGNED TO KEEP FOODS AT
OPTIMUM SERVING
TEMPERATURES THROUGH
PEAK SERVING PERIODS,

CLYMATE IQ[®]

WHEN
PERFORMANCE
MATTERS

CLYMATE IQ®

PRECISION HEATED AND HUMIDIFIED HOLDING CABINET

Competitive Comparisons

	FWE Clymate IQ PHTT-12	Brand M	Brand W	Brand CC	Brand CH	FWE Moisture-Temp MTU-12
Intelligent Closed Loop Solid State Controller ¹	X	X				
Solid State Controller	X	X	X	X	X	
Low Temp Alarm	X	X			X	
Low Water Alarm	X	X			X	
Humidity Measurement & Display	X	X			X	
Digital Temperature Display	X	X	X**	X	X	
Temperature Priority ²	X	X				X
Maximum Temperature	200°F	200°F	180°F	200°F	200°F	190°F
“Cabinet-Ready” Pre-Heat Time ³	32MIN	72MIN	62MIN	55MIN	37MIN	33MIN
Humidity Control	X	X	X	X	X	X
Maximum Relative Humidity at 160°F (71°C)	92%	90%	77%	88%	89%	72%
Proofing	X	X	X	X	X	X
Analog Control				X	X	X
Analog Temperature Display				X		X
Standard Full Height Capacity (3”Spacings)	18	18	14	12†	18	17
Field Reversible Doors	X	X	X	X	X	
Drip Trough (Equipped Standard)	X	X	X	X	X	X
Air Element (Watts)	2000	1950	1700	1750	1000	1320
Water Element (Watts)	2000	1950	1100	1750	1000	420
Removable Large Water Reservoir	X					X
Tri-Directional Electrical Cord	X					
IQ Software Upgradability	X					
Self-Closing Hinges	X	X	X			OPTIONAL
Self-Adjusting Magnetic Door Latch	X	X	X	X	X	OPTIONAL
Pass-Thru Option	X	X	X	X	X	X

1. Controller provides easy-to-use digital controls. Separate temperature and humidity dials allow precise humidity/temperature settings with tighter range than analog controls.

2. Values of preheat based on room temperature 70°F, humidity 35%, FWE advanced temperature priority dictates temperature set point achieved prior to humidity during operation.

3. Set Point of 160°F / 60% RH.

** Brand W: Displays water bath temperature by default.

† Brand CC: Capacity at 4.5” (114 mm) Spacings

PHTT-4S/6




TRAYS @ 4.5" (114 mm) SPACING		TRAYS @ 3" (76 mm) SPACING		EXTERIOR DIMENSIONS		
18 x 26		18 x 26			IN	MM
12 x 20		12 x 20		HEIGHT	74.5"	1892
14 x 18		14 x 18		DEPTH	29.75"	755
12 x 18		12 x 18		WIDE	27.75"	704
20 x 22		20 x 22		# OF DOORS	2	
10 x 20		10 x 20		CASTER SIZE	5"	127 mm
GN 2/1		GN 2/1				



PHTT-12



TRAYS @ 4.5" (114 mm) SPACING		TRAYS @ 3" (76 mm) SPACING		EXTERIOR DIMENSIONS		
18 x 26		18 x 26			IN	MM
12 x 20		12 x 20		HEIGHT	74.5"	1892
14 x 18		14 x 18		DEPTH	29.75"	755
12 x 18		12 x 18		WIDE	27.75"	704
20 x 22		20 x 22		# OF DOORS	2	
10 x 20		10 x 20		CASTER SIZE	5"	
GN 2/1		GN 2/1				

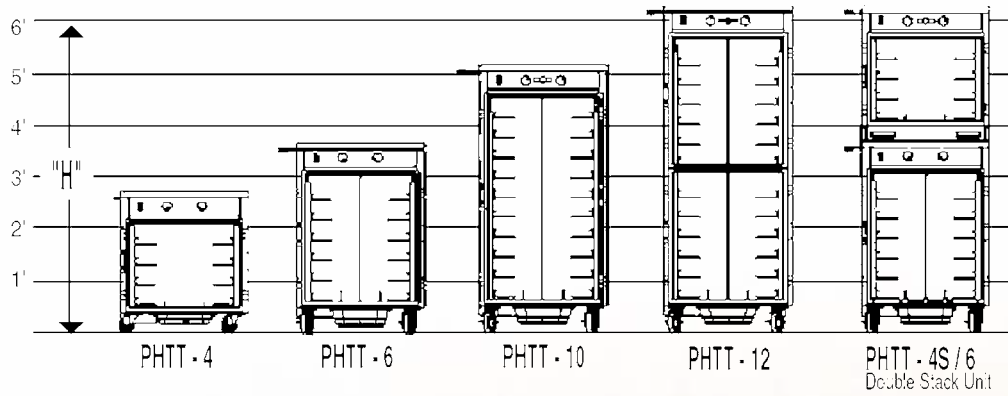

TRAYS @ 4.5" (114 mm) SPACING	PHTT-4	PHTT-6	PHTT-10
18 x 26	4	6	10
12 x 20	8	12	20
14 x 18	8	12	20
12 x 18	8	12	20
20 x 22	4	6	10
10 x 20	8	12	20
GN 2/1	4	6	10
TRAYS @ 3" (76 mm) SPACING	PHTT-4	PHTT-6	PHTT-10
18 x 26	6	9	14
12 x 20	12	18	28
14 x 18	12	18	28
12 x 18	12	18	28
20 x 22	6	9	14
10 x 20	12	18	14
GN 2/1	6	9	28
NUMBER OF DOORS	1	1	1
CASTER SIZE (inches)	5" 127 mm	5" 127 mm	5" 127 mm

	PHTT-4		PHTT-6		PHTT-10	
EXTERIOR DIMENSIONS	IN	MM	IN	MM	IN	MM
HEIGHT	32.25"	819	43.75"	1111	61"	1549
DEPTH	29.75"	755	29.75"	755	29.75"	755
WIDE	27.75"	704	27.75"	704	27.75"	704

7900 S. Route 31
Crystal Lake, IL 60014

Ph: 815.459.7500 • Toll Free: 800.222.4393
Fax: 815.459.7989

E-mail: Sales@FWEco.net



PRECISION HEATED AND HUMIDIFIED HOLDING CABINET
www.FWE.com/ClymateIQ