



# INFRARED HEATED HOLDING SHELVES

For 12" x 20" Pans, Fractional Pans, and GN

RADIANT "HHS-IR" SERIES

**Infrared elements maximize hold time of crisp fried product for batch cooking and staging**

**1** Infrared heat system extends hold of fried and crispy coated products up to one hour, allowing batch cooking prior to key rush periods, keeping foods at ideal temperature and texture

**2** All stainless steel construction designed for ease of cleaning


**3** Durable & Reliable - Engineered to have no moving parts to keep maintenance costs and down time at a minimum. Competitive products that utilize fans or filters get bogged down with grease which results in maintenance downtime and higher overall ownership costs

**4** Uses industry standard 2.5" deep full or fractional size hotel pans as the catch basin

**5** Adjustable legs for proper placement on uneven surfaces



### MODEL NOMENCLATURE




Infrared Elements



Easy to Clean



Uses Standard Hotel Pans




4" Adjustable Legs


*\*Two year limited warranty*

# SPECIFICATIONS

# INFRARED HEATED HOLDING SHELVES

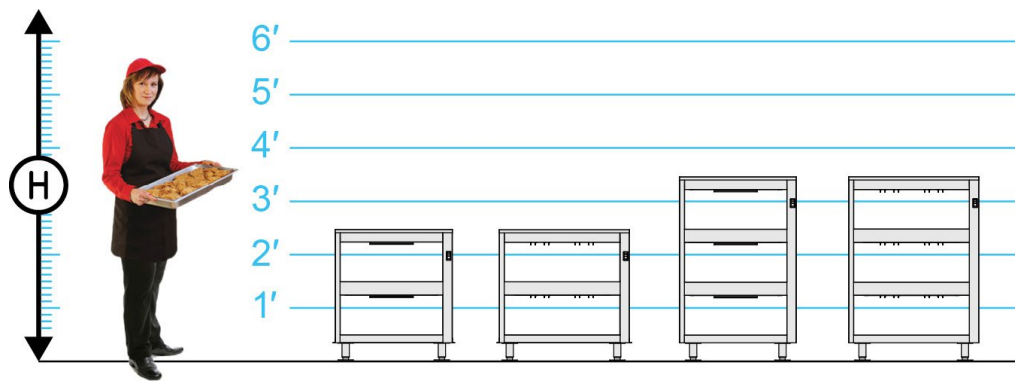

## SHELF TOP VIEW

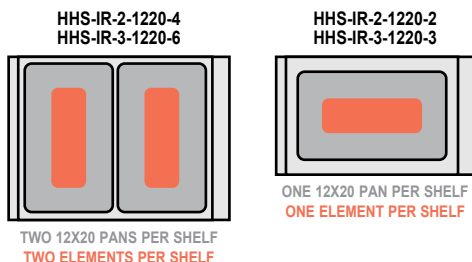

MODEL NUMBER	PAN CAPACITIES, 2.5" DEEP				OVERALL EXTERIOR DIMENSIONS IN. (mm)			SHIP WT. LBS. (KG)	LEG SIZE
	PER SHELF		TOTAL		HIGH "H"	DEEP "D"	WIDE "W"		
	12x20, GN1/1	12x10, GN1/2	12x20, GN1/1	12x10, GN1/2					
	1	2	2	4	29.75" (756)	16" (407)	26.75" (680)	140 (64)	4"
	2	4	4	8	29.75" (756)	22" (559)	29.75" (756)	150 (69)	4"
	1	2	3	6	41.75" (1061)	16" (407)	26.75" (680)	170 (78)	4"
	2	4	6	12	41.75" (1061)	22" (559)	29.75" (765)	180 (82)	4"

Models available with Individual Power Switches on Each Shelf, [add "IS"] to end of model number.

MODEL NUMBER	ELECTRICAL DATA					
	HHS-IR-2-1220-2			HHS-IR-2-1220-4		
VOLTS	120	208	220-240	120	208	220-240
WATTS	600	534	714	1200	1068	1428
AMPS	5.0	2.6	3.0	10	5.1	6.0
HERTZ	60	60	60	60	60	60
PHASE	Single	Single	Single	Single	Single	Single
PLUG USA	5-15P	6-15P	6-15P	5-15P	6-15P	6-15P
PLUG CANADA	5-15P	6-15P	6-15P	5-15P	6-15P	6-15P
MODEL NUMBER	HHS-IR-3-1220-3			HHS-IR-3-1220-6		
VOLTS	120	208	220-240	120	208	220-240
WATTS	900	801	1071	1800	1602	2142
AMPS	7.5	3.9	4.5	15	7.7	8.9
HERTZ	60	60	60	60	60	60
PHASE	Single	Single	Single	Single	Single	Single
PLUG USA	5-15P	6-15P	6-15P	5-15P*	6-15P	6-15P
PLUG CANADA	5-15P	6-15P	6-15P	5-20P	6-15P	6-15P

\*Dedicated circuit.

**CONSTRUCTION.** Heliarc welded, single unit construction of stainless steel; 22 gauge shelves, 20 gauge stainless steel polished exterior wall.

**INSULATION.** Insulated throughout: top, bottom, sides using high density ceramic and fiberglass insulation.

**LEGS.** Each leg shall be attached to a formed base with rivnuts.

**HEATING SYSTEM/CONTROLS.**

Radiant heat system shall include longwave infrared elements above each shelf. Controls shall include a master ON/OFF switch with power indicator light.

**ELECTRICAL CHARACTERISTICS.** 3 wire grounded power cord and plug, rear mounted for safety. See electrical data chart above for amperage, receptacle configuration and dedicated circuit information.

**INSTALLATION.** Unit should not be installed in an area where adverse environmental conditions are present.

**ELECTRICAL**

Individual power switches [IS]

**LEGS**

Legs with flanged feet

**EXTRAS**

Enclosed on three sides

Custom sizes available (consult factory)

